

Optimizing Pressure Matrices: Interdigitation and Interpolation Methods for Continuous Position Input

Paul Strohmeier¹, Victor Håkansson¹, Cedric Honnet², Daniel Ashbrook¹, Kasper Hornbæk¹

¹Human Centred Computing - University of Copenhagen, Denmark

²Sorbonne University, CNRS, ISIR, Paris, France

{p.strohmeier, dan, kash} @ di.ku.dk, victor@skavi.dk, cedric@honnet.eu

ABSTRACT

This paper provides resources and design recommendations for optimizing position input for pressure sensor matrices, a sensor design often used in eTextiles. Currently applications using pressure matrices for precise continuous position control are rare. One reason designers opt against using these sensors for continuous position control is that when the finger transitions from one sensing electrode to the next, jerky motion, jumps or other non-linear artifacts appear. We demonstrate that interdigitation can improve transition behavior and discuss interpolation algorithms to best leverage such designs. We provide software for reproducing our sensors and experiment, as well as a dataset consisting of 1122 swipe gestures performed on 17 sensors.

Author Keywords

Sensor design; piezoresistive; pressure matrix; pressure input; interdigitation; interpolation; eTextile.

INTRODUCTION

Continuous multi-touch pressure and position input is becoming increasingly mainstream, notably finding application in synthesizer controllers [6,36,37]. Pressure based position input is also used in wearable systems, including on-body gesture input [29], user authentication [32], object recognition [35], control of IoT objects [22] or detection body deformations [23].

These systems are often implemented using a resistive pressure sensor matrix, which consists of a pressure sensitive layer surrounded by conductive strips in a row and column arrangement. [5,6,23,29,35]. Often the sensor is connected to a gesture recognition system [23,29], allowing the user to perform discrete actions. Truly continuous position input, however, also requires locating pressure events that do not align with the sensor's electrodes. This is typically achieved through interpolation [6,27], however, even with interpolation the transition behavior from one electrode-strip

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the Owner/Author.

TEI '19, March 17–20, 2019, Tempe, AZ, USA © 2019 Copyright is held by the /author(s). ACM ISBN 978-1-4503-6196-5/19/03. <https://doi.org/10.1145/3294109.3295638>

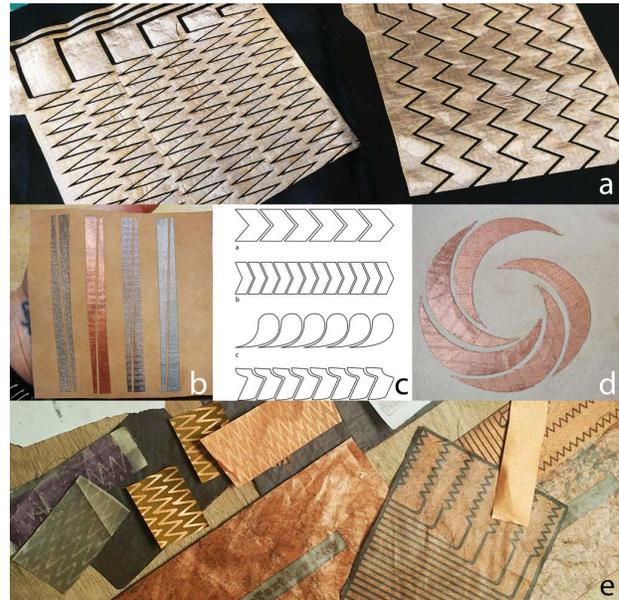


Figure 1 - a) Electrodes of two sensors used in this paper
b) capacitive sliders by Rachel Freire
c, d) electrode designs and circular slider by Kobakant
e) electrode testing samples at Datapalette

to the next introduces jumps or discontinuities [6,7]: Depending on the method chosen to extract the position of the finger, the signal might lag behind or jump ahead as a finger moves from one strip to the next (see video figure). There is no consensus if there is a best method to find touch-positions from such sensors, or what this method might be.

Our goal is to maximize the sensing resolution of pressure sensor matrices by methods other than increasing the electrode count. This can be done by leveraging the conductive properties of the resistive material [27], by interpolating the collected data [6], or by using diagonal or triangular electrode designs which create gradual transitions from one electrode to the next [34]. The latter approach, which we refer to as interdigitation, is quite common in DIY context (Figure 1, b,c,d,e), and can be found in product briefs and white-papers [15,30]. It is, however, not clear if and how such designs effect resistive pressure matrices.

We investigate effects of *interpolation algorithm choice* and *electrode interdigitation* on accuracy, precision, and consistency of touch-position sensing. In doing so we make three contributions: (1) We provide a data-set of 1122 swipe gestures performed on 17 sensors. This dataset is designed to

enable quick testing of algorithms for extracting positions for various sensor designs, pressure levels and touch sizes. (2) We analyze and compare eight peak-detection algorithms for extracting touch position. (3) We investigate the effects of interdigitated patterns on sensor performance. In additionally, we also provide all code used in this project, including the pattern-generator used for creating the sensors and a prototype simulation tool for testing electrode patterns.

This project was started to optimize eTextile sensors. While the results generalize to any resistive pressure sensor matrix, we discuss them in the context of eTextile sensing.

ADDITIONAL RESSOURCES

All code, data, and supplementary material can be found at: <https://datapalette.github.io/interdigitation/>

BACKGROUND AND RELATED WORK

Pressure Sensor Matrixes

Traditional resistive touchscreens can estimate the position of the touch, but not the amount of pressure exerted. There are variations which can do both, but these are uncommon, due to the complexity of their driving circuits [8]. A simpler alternative is to use a high number of discrete pressure sensors [16], however, this leads complex physical designs as n pressure positions require at least $n*2$ physical connections. Pressure sensor matrices provide a middle ground as they are relatively simple to understand and implement, and also scale well: n pressure positions only require $2\sqrt{n}$ physical connectors [8].

Pressure sensor matrices reduce physical complexity by multiplexing measurements; pressure sensitive strips are laid out in a row and column arrangement. Figure 2 (left) shows a schematic where the rows might connect to digital outputs and the column to analog inputs. The top left resistance is measured by grounding all rows, except for row 0 which is pulled high, and reading from column 0. The voltage values would then be sampled sequentially at all positions, resulting in a 2D array of rasterized pressure information (See Figure 2, center and right for a visualization of touch events).

eTextile Touchpads

Both the somewhat delicate mechanical layering required for designs inspired by traditional resistive touchpads [10] as well as the relatively fine traces of high resolution devices such as Rosenberg’s UnMousePad [27] are currently difficult to implement in fabric. As with conventional sensors, the workarounds include sensor arrays [17,21] that require a relatively large amount of physical connections. Various unconventional solutions, such as the XY textile by

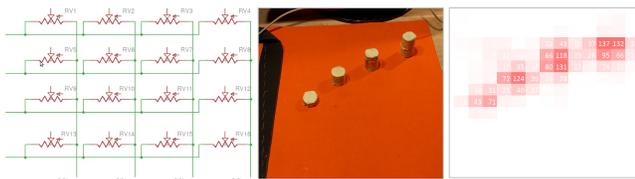


Figure 2 - (left) 4 by 4 pressure matrix circuit. (Center) 16*16 pressure sensor matrix, and (right) raw data output [6].

Donneaud [14] and a solution that shares many similarities with a 4-wire touchpad by Freed et al. [28] have been suggested, but are rarely seen as the relative simplicity of the pressure sensor matrix eventually made it the default design.

Due to their softness, pliability, and the ease with which they can be integrated in everyday objects such as clothing or furniture, textile pressure matrices are also commonly used for pose detection while sleeping [22] or sitting [36,40], as well as activity tracking [23,35,43]. Fabric pressure sensor matrices are also used for object recognition [27,42]. Within the HCI community, pressure sensor matrices have been used for gestural input [24,33] body pose as input [38] as well as user identification [39]. These applications do not require the detection of smooth transitions between strips. Instead, the maximum position is used with geometric models [33] or the analog data is converted to a binary image before applying computer vision methods [24,27,40]. Machine-learning methods are also used for extracting relevant information from the raw data [38,39]. The focus of this research lies on applications and the post processing of the sensor data. Only few papers report sensing accuracy [7] which makes it difficult to establish best practices for the physical design and construction of the sensor.

As pressure sensitive touch-surfaces are an intriguing musical input modality, the modern experimental music and NIME communities have been instrumental in pushing eTextile input forward [33]. The availability of piezo resistive materials supported prototyping of a range of new input methods [9] which eventually resulted in various pressure matrix designs both in the NIME [28] and DIY communities. Popular products such as the Roli Seaboard [36] or the Joué board [37] demonstrate the demand for high-resolution continuous input, which makes empirically establishing best practices increasingly relevant.

Interpolation in Software and Hardware

As pressure is sampled at discrete intervals, the center of an object or finger is typically not aligned with the sensing elements. Finding the center of a pressure point therefore requires additional steps (see Figure 2, center and right). Most work investigating this focuses on capacitive input, as it is currently the most common method for multi-touch sensing. Examples include comparisons of electrode patterns and interpolation methods [1].

Finding a signal maxima between sensing elements is common also outside of touch-screen design and is generally referred to as sub-pixel peak estimation [2,20]. An overview is presented by Naidu and Fisher [7,19] who conducted an empirical analysis of eight algorithms. They noted that all algorithms tested by them displayed periodic error patterns, similar to those observed in the transition behavior of textile pressure matrices [6]. Naidu and Fisher claim these errors to be “symptomatic of the sensor structure” [7].

There appear to be three factors influencing transition behavior: (1) the spread of the signal of interest [6,7], (2) the

peak detection algorithm [7] and (3) the physical design of the sensor [7]. However, there is comparatively little work exploring alternative sensor structures in pressure-sensor matrices. Rosenberg et al. present a matrix that utilizes the horizontal conductivity of the resistive material for better interpolation [25] and demonstrate how adding additional ‘dummy electrodes’ linearizes the horizontal conductivity [27]. The method used by Rosenberg et al. assumes a touch from the tip of a stylus. It is unclear if their approach generalizes to the larger touch area of a fingertip.

An alternative approach uses triangular interdigitation. If one moves a finger from one strip to the next at a fixed speed, the transition occurs faster if the motion is perpendicular to the strips than if the strips are arranged diagonally. Yoo and Pines demonstrate this approach in a ‘center of pressure’ sensor [34], however they chose a design which only supports input at discrete positions. Triangular interdigitated designs can also be found in white-papers and application notes for capacitive slider design [15,30] and are also common in the DIY community: They are being explored in Paris based textile hackerspace Datapaulette, they can be found in the web-archive by Satomi and Perner-Wilson [38], as Instructables by Freire [37] or in the eTextile swatchbook [11] (see also Figure 1). While triangular interdigitated designs are quite common, they are often justified based on intuition and – to the best of our knowledge – their effectiveness has never been evaluated.

SENSORS Design

We created a processing sketch that generates interdigitated patterns and exports them as .pdf, ready for laser cutting (Figure 3). For the patterns used in the dataset we used triangular digits. We varied the digits using two parameters:

Digit Width: Low digit width allows many digits to fit (Figure 3, top). High digit width means that only few digits fit on the strip (Figure 3, bot). *Digit Width* is the dimension parallel to the sensing strip.

Digit Length: Low digit length means that there is little overlap between electrodes (Figure 3, left). High digit length means that there is significant overlap (Figure 3, right). *Digit Length* is the dimension perpendicular to the sensing strip.

Implementation

We built our sensors according to Donneaud et al. [6], however, we created the electrodes following instructions by Strohmeier et al. [31]: We used conductive ripstop [38] for creating the sensing electrodes. We prepared it by ironing the Ripstop to dual-sided fabric bonding. Then, using dual-sided scrapbook adhesive [39] we glue the ripstop to an MDF board (bonding glue side up). We insert the board with the ripstop into the laser-cutter and cut the pattern. Once we remove the MDF and ripstop from the laser cutter, we gently peel off all excess material from the board, so that only the electrodes remain glued to the board. We then place a second piece of textile – this time non-conductive – on top of the

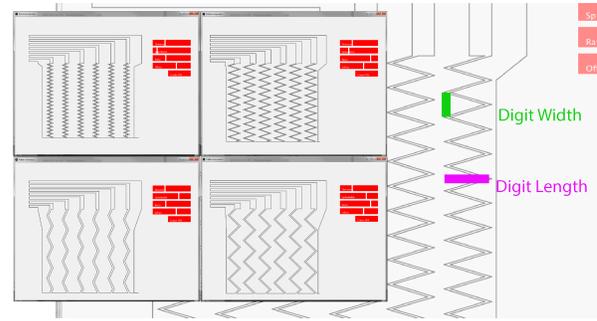


Figure 3 - Screenshots of pattern generator, four patterns. Top: low *Digit Width*, bot: high *Digit Width*, left: low *Digit Length*, right: high *Digit Length*

electrodes and iron it in place. Once the bonding has securely connected the electrodes to the non-conductive fabric, we pull both fabric layers off the MDF board.

This method allowed us to create more precise patterns, as we did not need to manually arrange the electrodes on fabric backing. We used piezo-resistive, non-woven fabric by Eeonyx (20kΩ per square) for our resistive layer (Figure 4).

Dimensions

We created 17 sensors. One sensor with no interdigitation, and 16 sensors with a 4*4 factorial design of width and length (*digit length*: 55%, 70%, 85%, 100% of strip spacing) and *digit width*: 95%, 75%, 55%, 35% of strip spacing). We chose our broadest digit (55% length, 95% width) to approximately match DIY designs and White Paper recommendations [15,30]. Our sharpest digit was limited by our manufacturing ability. We only created a single side of each matrix. As our primary interest is to better understand transition behavior between sensing electrodes, the full matrix is not required.

Each sensor was ~160mm wide and consisted of 7 electrodes with a 25mm spacing between strip-centers (the first and last strip were truncated). We use both larger touch-sizes and larger strip widths than we typically use. The larger strip width allows us to evaluate designs which we currently could not manufacture at fingertip scale, the larger touch sizes means we maintain the expected ratio between ‘finger’ and sensing elements. We chose the sizes so that the ‘small’ touch-size approximates the size of a human fingertip.

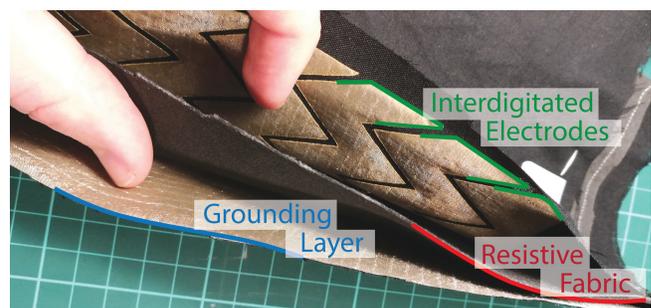


Figure 4 - Interdigitated electrode layer, piezo resistive layer and grounding layer sandwiched in black backing fabric.

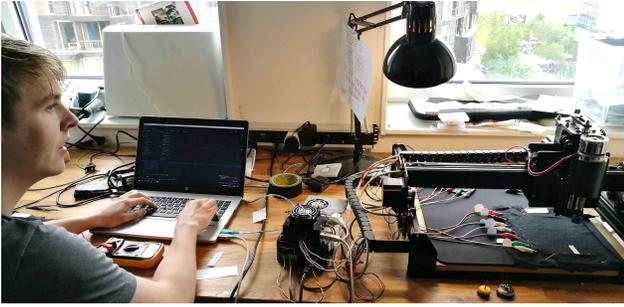


Figure 5 - CNC rig used for collecting data.

DATA COLLECTION

We used a CNC machine [40] to ensure consistent touch-behavior in terms of pressure and location. We created modified Dremel bits that acted as ‘fingers’ that would press on the sensor. The ‘fingers’ were made of Sugru with a rubber disk (cut from a mouse-pad [39]) beneath them to approximate the softness of the human fingertip (Figure 5).

Each strip was sampled by an analog input of an Arduino Uno. We wrote a JavaScript controller that coordinates data logging and communicates between the CNC and Arduino. The controller is open source and can be downloaded from the projects GitHub page. We used this controller to perform an approximation of a swipe gesture by measuring pressure at 70 consecutive locations on the sensor with 1mm spacing. For each sensor we repeated this swipe gesture 11 times, with 2.5mm offset for a total of 770 points.

This was repeated for three touch sizes (50%, 100%, 150% of strip spacing) crossed with two pressure settings (strong/gentle), where ‘strong’ was set to take full advantage of the dynamic range of the sensor and ‘gentle’ was the lowest pressure level we could consistently detect. In total we collect 4620 touch events per sensor for a total of 78.540 touch events over all 17 sensors.

Assumptions and Limitations

We report independent variables and results in *percent of strip spacing* (25mm center to center) to support generalization to sensors and patterns of different sizes, and comparisons to previous evaluations [6]. Another relevant unit, however, is the ratio of touch size to strip width. We assume that (within limits) there is an equivalency in increasing the touch size by 100% to reducing strip size by 50%. The touch-size conditions can be either thought of as changing the size of touch area, or as changing size of strip-width relative to a constant touch size.

Our application scenario is continuous control of audio or video content, so our primary goal is that the user’s motion over the eTextile results in a corresponding change in output signal, without jumps or discontinuities.

The Data

We provide the raw log files as we recorded them, including various metadata. We also provide a ‘normalized’ version. Here we removed the noise-floor, rescaled the strips so their dynamic range is from 0 to 1 and applied a low-pass filter.

All the modifications done to the ‘normalized’ data can be done in real time by an embedded system. For the rest of the paper we will be referring to the ‘normalized’ dataset.

ALGORITHM SELECTION

We chose eight algorithms for detecting touch-positions based on previous work on subpixel peak estimation [1,7] and precedent in eTextile matrix designs [6]. As a point of reference, we also add a ‘naïve’ estimator (NAIVE), which simply places the touch-position at the center of the strip with the highest pressure reading, as was used for gesture extraction by Schneegass et al. [29].

We test five algorithms that fit a function through the strip with the highest pressure reading and its neighbors. These assume that there is a linear (LINE) [1,7], gaussian (GAUSS) [1,7,20], cubic (CUBIC) [6,24], or parabolic (PARA) [1,7] spread of pressure from the maximum pressure point. Additionally we test a filtered version of the parabolic estimator, suggested by Blais and Rioux (B_R) [3,7].

We test two geometric solutions: The mTouch algorithm by Microchip [18] which fits a centroid around the maximum pressure values and its neighbors (mTOUCH) and the center of mass (COM) for all strips as a touch-estimator. For our sensor these are equivalent to COM3 and COM7 suggested by Fisher and Naidu [7].

These methods can further be combined with blob tracking: The function fitting methods can be used to calculate the boundaries of the blob [13], for example Donneaud et al. use bicubic interpolation to find the boundaries of blobs with greater accuracy [6]. The geometric methods can be used to improve the estimate of the blob center, for example Burstyn et al. detect blobs using the naïve approach, but estimate the touch-position within the blob using center of mass [4]. As these combinations also can be done at arbitrary threshold levels, testing them is beyond the scope of this exploration, however we believe our results can guide designers towards informed choices on reasonable combinations. We will refer to these algorithms as *method* from now on in the paper.

DATA ANALYSIS

Using the collected pressure values, we (1) compute the touch position for each measured position and each method. The resulting positions are in units of strip-width. We (2) scale each *sensor*method* combination to match the expected range in mm. We then (3) calibrate the values by subtracting the y intercept of the regression line and multiplying each value by one minus the slope of the regression line (Figure 6). The resulting positions are in the

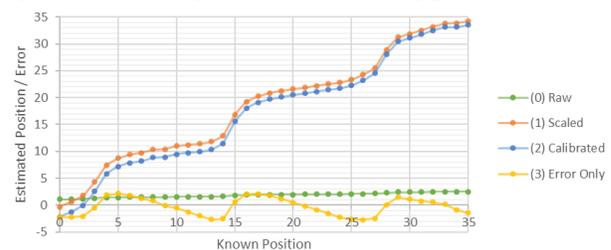


Figure 6 – Data Processing steps

correct range, with a regression line of $y = x$ (blue). We then subtract the known position from the estimated position to find the error. This resulted in 36,960 error measures per sensor (770 positions by 8 *methods*, 3 *touch sizes*, 2 *pressure levels*) for a total of 628 320 error measures.

We investigate sensor **accuracy**, **precision** and **consistency** over pressure levels, using measures derived from this error measure. For sensor **accuracy** we need a measure that describes how far the estimated positions are from the known position, on average. We therefore analyze the absolute error (36,960 data points per sensor). For sensor **precision** we wish to know how consistent the output is between swipes (3360 data points per sensor). We therefore analyze the standard deviation at each x-position of all swipe motions. Finally, for sensor **consistency** we wish to know if the output behavior is consistent across pressure levels. We therefore analyze the correlation between the mean swipe positions at strong and at gentle pressure levels (24 points per sensor).

While the multiple swipe measures might suggest using a repeated measures ANOVA, the swipes are all performed by the same device, and the variability between them is negligible. This would reduce our degrees of freedom without reducing the error term. We therefore opt for univariate ANOVAs. Our sample size for sensor **accuracy** is very high, allowing us to detect significant effects, even if the effect size is very small. **Precision** and **consistency** use successively higher-level concepts, leading to smaller samples sizes. For the consistency measure the sample size is so too small for a full factorial analysis.

For **accuracy** we analyzed *absolute error* by *digit width*, *digit height*, *touch size*, *pressure* and *method*. All main effects and all interaction effects were statistically significant at the $p < .0001$ level.

Precision was analyzed using *standard deviation* by *digit width*, *digit height*, *touch size*, *pressure* and *method*. All main effects and all interactions, except for touch size * method and digit width * method, were significant at $p < .0001$.

For **consistency** we performed two separate ANOVAs once *correlation* by *digit width* and *digit height* and once on *correlation* by *touch size* and *method*. There were no significant effects for *digit width* or *digit height*. For *touch size* and *method*, all main effects and all interaction effects were statistically significant at the $p < .0001$ level.

Due to our large sample sizes for **accuracy** and **precision**, it is not surprising that we could demonstrate significant differences even for very small effects. We therefore also report effect sizes, which typically were small, except for the effect of *method*, which was medium. The effect size reported is partial eta squared – any variance explained by other variables is removed. This allows for easy comparisons between parameters when exploring other electrode design manipulations. It should be noted that eta measures typically overestimate effect sizes, but that we believe this to be negligible in our case due to the large sample sizes.

All significant results maintain the $p < .0001$ level after correcting for family wise error – we will from now on not report these. The F-statistics and effect sizes, as well as Bonferroni corrected post-hoc analysis, will be presented where relevant.

RESULTS

Pressure

Pressure	Error	Lower Bound	Upper Bound	Deviation	Lower Bound	Upper Bound
<i>Gentle</i>	10.86%	10.84%	10.89%	5.48%	5.40%	5.56%
<i>Strong</i>	11.63%	11.60%	11.66%	4.01%	3.94%	4.04%

Table 1 – Means and 95% confidence intervals for pressure

We found that on average that low pressure performed better than high pressure over all sensors for **accuracy** ($F_{(1, 627504)} = 627504$, $\eta_p^2 = .001$). This effect, however, is dwarfed by the comparatively larger effect of pressure on **precision** ($F_{(1, 56304)} = 535.056$, $\eta_p^2 = .009$), where the strong pressure outperforms the gentle pressure. Increased **accuracy** of gentle touches comes at the cost of reduced **precision**.

Touch Size

Touch Size	Error	Lower Bound	Upper Bound	Deviation	Lower Bound	Upper Bound
<i>50%</i>	11.96%	11.93%	12.00%	6.17%	6.17%	6.17%
<i>100%</i>	11.50%	11.46%	11.53%	4.68%	4.68%	4.68%
<i>150%</i>	10.28%	10.25%	10.32%	3.39%	3.39%	3.39%

Table 2 – Means and 95% confidence intervals for touch size

We vary *touch size*, as it allows us to explore various *touch size* to *strip width* ratios. One can also assume the 50%, 100% and 150% touch sizes to represent strip widths of 200%, 100% and 66.6% finger size.

Increasing the touch size had a positive effect on **accuracy** ($F_{(2, 627504)} = 1414.744$, $\eta_p^2 = .004$) and an even stronger effect on **precision** ($F_{(2, 56304)} = 583.094$, $\eta_p^2 = .020$). Bonferroni corrected post-hoc analysis showed that each successively larger size performed significantly better than the previous size for both accuracy and precision (Table 1).

The interactions between strip width and *touch size* lead to various periodic behaviors, and some sensors display the opposite trend as we find on average. Figure 7 shows the average change between consecutive pressure readings for all x positions of a swipe gesture on the non-interdigitated sensor. For the small touch position (top) there is always a sensor where values are changing, providing information that the touch-point has moved between readings. For the medium touch size (middle), the areas where change occurs begin to cluster and for the large touch size (bottom) they begin to completely overlap. About half of the swipe distance there is no change in signal which might indicate a change in position (~10-25mm, 35-50mm, >60mm), This causes most peak detection methods to first underestimate and then overestimate the change in position between measures.

The medium touch size performed best in terms of **consistency** over pressure levels ($F_{(2, 384)} = 15.26$, $\eta_p^2 = .074$).

Digit Length

Digit Length	Error	Lower Bound	Upper Bound	Deviation	Lower Bound	Upper Bound
none	11.26%	11.17%	11.34%	2.43%	2.21%	2.65%
55	10.84%	10.80%	10.88%	3.98%	3.87%	4.09%
70	11.19%	11.15%	11.23%	4.68%	4.57%	4.79%
85	11.22%	11.18%	11.26%	5.56%	5.44%	5.67%
100	11.73%	11.69%	11.77%	5.34%	5.23%	5.45%

Table 3 – Means and 95% confidence intervals for digit length

Digit length is the dimension of the digit perpendicular to the strip. It has a significant effect on **accuracy**, however it is very small ($F_{(3, 627504)} = 308.705$, $\eta_p^2 = .001$). Digit Length of 55% had the lowest, and 100% had the highest average errors. There is a proportionally much stronger interaction effect with touch-size ($F_{(6, 627504)} = 650.756$, $\eta_p^2 = .006$). *Digit length* causes the strips to overlap, effectively increasing their width. This changes the periodic effects described in the touch-size section. Figure 8 compares the digit lengths of the interdigitated sensors using the large *touch size* and 35% *digit length*. With increasing *digit length*, the ‘dead zones’ become increasingly smaller, until zones appear where changes can be detected two separate strips simultaneously.

Not all position estimation algorithms can fully leverage this though, which is reflected in an even stronger three way interaction between *digit length*, *touch size* and *method* ($F_{(42, 627504)} = 481.955$, $\eta_p^2 = .008$).

There is also a – comparatively – strong effect of digit length on **precision** ($F_{(3, 56304)} = 159.583$, $\eta_p^2 = .008$), post hoc tests show that all levels are different, but most notably the non-interdigitated sensor performs best.

Digit Width

Digit width is the dimension of the digit parallel to the strip and had the strongest effects on **accuracy** and **precision** of all physical parameters. Reducing the digit width has a positive effect on **accuracy** ($F_{(3, 627504)} = 564.239$, $\eta_p^2 = .003$) with all levels showing a significant difference to each other, except for the non-interdigitated sensor and 75% condition. Reducing digit width has a strong positive effect on **precision** ($F_{(3, 56304)} = 848.321$, $\eta_p^2 = .043$). Large touch sizes seem to benefit most from this, which is also demonstrated by an interaction effect with touch size ($F_{(6, 56304)} = 249.334$, $\eta_p^2 = .026$). Reducing the *digit width* can, on average reduce the error over a non-interdigitated sensor, however at the cost of precision. Reducing the width increases precision, the trend suggests digit widths <35% will match the precision of non-interdigitated sensors (Figure 9).

Method

One of the strongest effect found in our analysis was that of method on **accuracy** ($F_{(7, 627504)} = 31596.752$, $\eta_p^2 = .261$). This is most likely in part driven by the inclusion of the NAIVE estimator which produced on average more than triple the error of the two best algorithms. mTOUCH and LINE performed similarly well on **accuracy** and were significantly better than all others. We also found no significant difference between COM and CUBIC, but beside those all methods were significantly different (Figure 10).

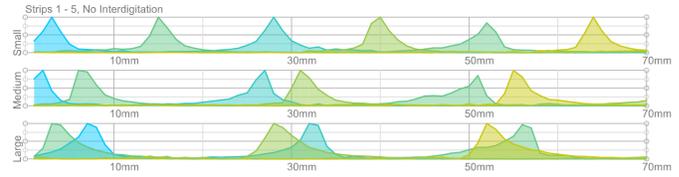


Figure 7 – Average change between readings, per electrode. The graphs are normalized relative to the maximum recorded change per strip. Each color corresponds to an electrode.

We found small, but significant simple interaction effects with both *digit width* ($F_{(21, 627504)} = 63.642$, $\eta_p^2 = .002$) and *digit length* ($F_{(21, 627504)} = 95.596$, $\eta_p^2 = .003$). We also found comparatively strong interaction effects with *touch size* ($F_{(14, 627504)} = 281.349$, $\eta_p^2 = .006$), and a three way interaction with *touch size* and *pressure* ($F_{(14, 627504)} = 603.918$, $\eta_p^2 = .013$) as well as *digit length* and *pressure* ($F_{(21, 627504)} = 175.997$, $\eta_p^2 = .006$). This suggests that the interpolation methods do not perform equally on all sensors, and that there is even larger variation based on varying pressure and size of the touch. In general, curve fitting methods performed best with small touch-sizes and low pressure, while the geometric methods performed best for strong pressure and large touch.

Finally, there was also an effect of method on **precision** ($F_{(7, 56304)} = 98.828$, $\eta_p^2 = .012$). Here GAUSS dethrones mTOUCH as the best solution. LINE has become significantly worse than mTOUCH (Figure 10).

There was a significant effect of method on **consistency** ($F_{(7, 384)} = 15.257$, $\eta_p^2 = .417$). Post hoc tests showed that NAIVE performed significantly worse than all others. CUBIC performed better than NAIVE but was also significantly worse than the remaining methods. There was also a significant interaction effect of *method*touch size* ($F_{(14, 384)} = 11.364$, $\eta_p^2 = .293$). This effect is, however, completely due to the NAIVE condition, which performed best with small and worst with large touch sizes.

DISCUSSION

Our analysis demonstrates that triangular interdigitation can improve the **accuracy** of eTextile pressure sensor matrices. We found that for all *digit lengths*, the **accuracy** is improved on average, but at the cost of **precision**. We found that wide digits performed worse than non-interdigitated sensors. The 55% *digit width* condition, however, already outperformed the non-interdigitated sensor in terms of accuracy and the 35% *digit width* condition was even significantly more accurate than both 55% and non-interdigitated, while approaching the non-interdigitated sensor in terms of

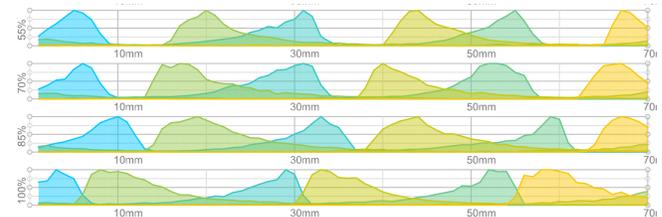


Figure 8 – Average change between readings. As digit length increases, the ‘dead zones’, where there is no information to infer change of position, gradually vanish.



Figure 9 – Means and 95% confidence interval for effects of digit width on accuracy (top) and precision (bottom). The accuracy graph is zoomed in. Lower scores are better.

precision. For the large *touch size*, the interdigitated designs outperformed the non-interdigitated designs at all levels of digit width and digit height for both **accuracy** and **precision**.

Regarding peak estimation method, we found that both the mTOUCH and the LINE algorithm performed significantly better than all others on **accuracy**. We speculate, however, that they might feel very differently. We believe that there is a certain subjective dimension to interpolation which should not be ignored. We draw an analogy to the effects of latency on musical input – if latency is consistent, it is perceived as a property of the *feel* of the instrument, but if the latency varies, it is perceived as negatively impacting the quality of the instrument [12]. In our case it is not clear how relevant the average accuracy or even precision is, compared to the consistency and ‘feel’ of the errors. The LINE method, for example, has a distribution of errors which appears chaotic and somewhat difficult to predict compared to the mTOUCH method. The GAUSS method, on the other hand has relatively larger errors, but very good **precision** and **consistency** over pressure levels. The CUBIC method appears as a reasonable choice in terms of **accuracy**, however it performed significantly worse than all others in terms of **precision**. A visualization comparing interpolation methods for the non-interdigitated sensor and the 35% *digit width*, 100% *digit height* condition can be seen in Figure 11. The supplementary material includes these for all sensors.

While the mTOUCH method performed well on the clean data, anecdotally, we observed that the mTOUCH method led to periodic jumps when testing on the non-normalized dataset. In the normalized dataset this did not happen, presumably due to removing the noise-floor. The COM method did not display this problem.

An Excel sheet for exploring all combinations is attached in the supplementary material as well as our GitHub repository.

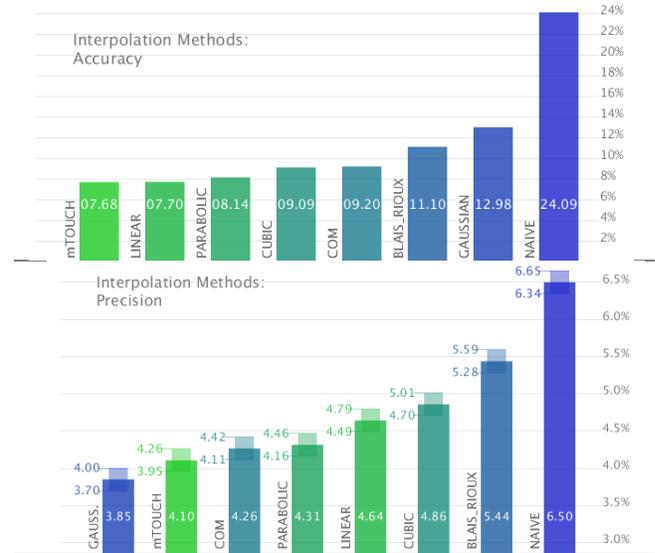


Figure 10 – Means and 95% CIs for effects of interpolation method on accuracy (top) and precision (bottom). The precision graph is zoomed in. The confidence intervals for accuracy are too small to display (0.11% on average, all differences are significant). Lower scores are better.

Recommendations

Overall, our data suggests using a *digit length* of 85%, *digit width* of 35% or smaller, *touch size* 150% (or strip size 66% of touch size) and either mTOUCH or LINE interpolation method. If the strip is wider than the touch size, then PARA is the preferred algorithm. Of all combinations tested, the combination which minimized errors and variance was 100% *digit length*, with 35% *digit width*, 150% *touch size* and using the mTOUCH *method* (see also Figure 11, right).

We suggest *method* and electrode design should match the application: For example, if one intends to build a footstep sensor for children, one might start with the assumption that a child’s foot is 6cm wide and space electrodes 4cm apart (making the *touch size* 150%). To maximize **accuracy**, one might design the electrodes to minimize *digit width* and use 100% *digit height* and use mTOUCH *method*.

If one is building a music controller and values **precision** over accuracy, one might choose the GAUSS *method* to ensure **consistent** behavior. Assuming a fingertip is 15mm wide, the strip spacing should be ~10mm. As interdigitation reduces precision, one might choose not to use interdigitation and instead map the electrodes so the periodic errors can be easily understood – for example one strip per half tone. If one does not wish to sacrifice accuracy, one could consider adding small digits, e.g. 55% *digit length* while minimizing *digit width*. Additional resources for parameter choice can be found in the supplement and our GitHub repository.

Comparisons with the state of the art

Comparing the input fidelity of matrix pressure sensors is difficult, as details are often not reported, or design parameters and goals differ greatly. For example, RESi demonstrates a potentially high electrode density [21] and

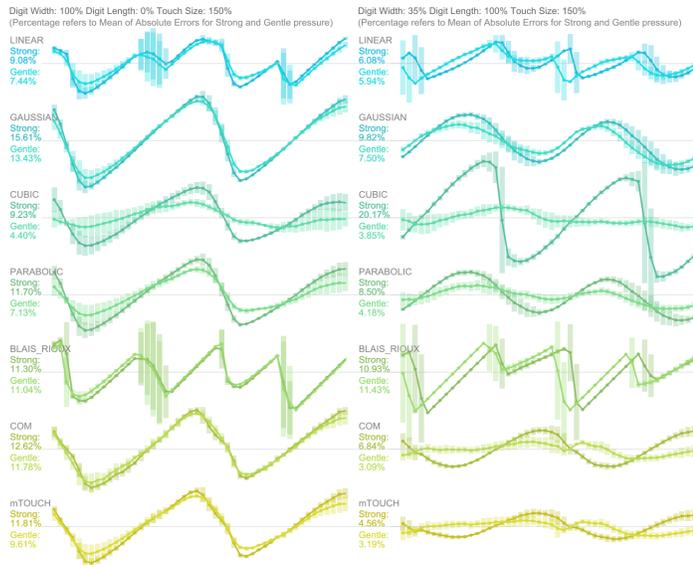


Figure 11 - Methods for non-interdigitated sensor (left) and 35% digit width with 100% digit height (right).
X-axis shows the known position, y-axis shows the average deviation from that position. Blocks indicate the 95% confidence interval of the average at that position.
(See our GitHub repository for more details)

the unMousePad [26] even increases the resolution possible due to high density with physical interpolation. Our design goal is to maximize the sensing resolution independently of electrode density, as this simplifies the physical interface. We argue that a useful benchmark in comparing design choices is to compare errors relative to strip spacing, as this is less dependent on the circumstances of the specific implementation. The only papers we could find that provide an accuracy measure were by Rosenberg et al. [26] and by Donneaud et al. [6], reporting an error of 4.89% and 6% respectively. Our best result (35% *Digit Width*, 100% *Digit Length*, *gentle pressure*, COM) almost doubles the accuracy of the eTextile Matrix by Donneaud with 3.09% and even improves on the relative error size of Rosenberg’s unMousePad. The more consistent result achieved with the mTOUCH approach with the same physical sensor but averaging both *gentle* and *strong* pressure has a slightly larger average error at 3.875%, but still outperforms both Donneaud’s and Rosenberg’s designs.

Limitations and Future Work

The sensors we designed are flat, while many applications of fabric pressure matrices are not. Especially wearable solutions need to conform to the shape and movements of the body [9] which inevitably leads to artefacts and noise [10]. While any sensor design would be subject to such problems, and we therefore believe that our design recommendations still hold, it is possible that some algorithms perform better than others when subject to noise. Hybrid sensing has been suggested as a way to minimize such problems [31].

We maximized the pressure sensitive area of our sensors. Other approaches, such as sensors using zebra-fabric [22] or

pressure sensitive threads [21], have zones that are not sensitive to pressure between electrodes. It is not clear how the tested algorithms perform under such conditions. While we encourage that such designs utilize interpolation, our work is aimed specifically at interdigitated sensors.

Our work points towards periodic interactions between the ratio of touch size and strip width and that of digit lengths (Figures 7 and 8). Our data and the analysis by Donneaud et al. [6] suggest that this is a topic that deserves further exploration, for example by disrupting the periodic interactions through varying strip-widths. We created and share a prototype tool for testing electrode patterns which could be used to explore this. Additional work is however required to validate this tool using the dataset we provide.

Fisher and Naidu [7] suggest reducing error by modelling the periodic effects. This would also be relevant to eTextile pressure matrices. All peak estimation methods tested by us assumed an underlying behavior of the signal distribution. As we do not believe any of the estimators we tested to be ideal, we suggest that future work either model the signal distribution of the piezo resistive material, or use parameter free approaches, such as Gaussian Processes [39]. Finally, to fully utilize interdigitation, we need better prototyping methods such as screen printing, etching, or in-situ polymerization.

CONCLUSION

This paper presents an exploration of factors influencing the design of eTextile sensor matrices. Using a combination of 100% *digit length*, 35% *digit width*, 150% *touch size* and the mTOUCH *method* we are able to achieve a relative pressure sensing accuracy higher than reported for previous pressure sensor matrices, both textile and non-textile.

While we are pleased with this result, our work is primarily intended as a resource for designers of textile input devices. We therefore share our data-set for testing algorithms under various conditions, we provide an evaluation showing the importance of digit width, touch size and algorithm choice, and we share implementations of our algorithms as Processing functions. The supplementary material of this paper also contains visualizations of the errors and variability of errors for all sensors, all touch sizes and all pressure levels. All code, data and additional material can also be found at <https://datapalette.github.io/interdigitation/>

Our investigation shows that currently the resolution at which the digits can be manufactured in textile limits the utility of interdigitated pressure matrix designs, however, our work also suggests that the approach is promising and that it is worthwhile investigating new methods for prototyping at high resolution in fabric.

ACKNOWLEDGEMENTS

This work was supported by the European Research Council, grant no. 648785, Labex SMART (ANR-11- LABX-65) and French state funds under reference ANR-11-IDEX-0004-02.

RELATED WORK

- [1] Humza Akhtar and Ramakrishna Kakarala. 2014. A methodology for evaluating accuracy of capacitive touch sensing grid patterns. *IEEE/OSA Journal of Display Technology* 10, 8: 672–682. <https://doi.org/10.1109/JDT.2014.2312975>
- [2] Humza Akhtar and Ramakrishna Kakarala. 2014. A Comparative Analysis of Capacitive Touch Panel Grid Designs and Interpolation Methods. *International Conference on Image Processing(ICIP)*: <https://doi.org/10.1109/ICIP.2014.7026172>
- [3] François Blais and Marc Rioux. 1986. Real-time numerical peak detector. *Signal Processing* 11, 2: 145–155. [https://doi.org/10.1016/0165-1684\(86\)90033-2](https://doi.org/10.1016/0165-1684(86)90033-2)
- [4] Jesse Burstyn, Paul Strohmeier, and Roel Vertegaal. 2015. DisplaySkin. In *Proceedings of the Ninth International Conference on Tangible, Embedded, and Embodied Interaction - TEI '14*, 165–172. <https://doi.org/10.1145/2677199.2680596>
- [5] Jingyuan Cheng, Bo Zhou, Paul Lukowicz, Fernando Seoane, Matija Varga, Andreas Mehmman, Peter Chabreck, Werner Gaschler, Karl Goenner, Hansjürgen Horter, Stefan Schneegass, Mariam Hassib, Albrecht Schmidt, Martin Freund, Rui Zhang, and Oliver Amft. 2017. Textile Building Blocks: Toward Simple, Modularized, and Standardized Smart Textile. 303–331. <https://doi.org/10.1007/978-3-319-50124-6>
- [6] Maurin Donneaud, Cedric Honnet, and Paul Strohmeier. 2017. Designing a Multi-Touch eTextile for Music Performances. In *Proceedings of the International Conference on New Interfaces for Musical Expression*, 7–12.
- [7] Robert Fisher and K. Naidu. 2001. A Comparison of Algorithms for Subpixel Peak Detection. September 2001. <https://doi.org/10.1007/978-3-642-58288-2>
- [8] Adrian Freed. 2009. Novel and Forgotten Current-steering Techniques for Resistive Multitouch, Duotouch, and Polytouch Position Sensing with Pressure. *Proc. NIME '09*: 230–235.
- [9] Rachel Freire, Paul Strohmeier, Cedric Honnet, Jarrod Knibbe, and Sophia Brueckner. 2018. Designing eTextiles for the body: Shape, volume & motion. In *TEI 2018 - Proceedings of the 12th International Conference on Tangible, Embedded, and Embodied Interaction*, 728–731. <https://doi.org/10.1145/3173225.3173331>
- [10] Florian Heller, Stefan Ivanov, Chat Wacharamanatham, and Jan Borchers. 2014. FabriTouch: Exploring Flexible Touch Input on Textiles. *Proceedings of the 2014 ACM International Symposium on Wearable Computers - ISWC '14*: 59–62. <https://doi.org/10.1145/2634317.2634345>
- [11] Anja Hertenberger, Barbro Scholz, Beam Contrechoc, Becky Stewart, Ebru Kurbak, Hannah Perner-Wilson, Irene Posch, Isabel Cabral, Jie Qi, Katharina Childs, Kristi Kuusk, Lynsey Calder, Marina Toeters, Marta Kisand, M.T. Bhömer, Maurin Donneaud, Meg Grant, Melissa Coleman, Mika Satomi, Mili Tharakan, Pauline Vierne, Sara Robertson, Sarah Taylor, and T.R. Nachtigall. 2014. 2013 E-Textile swatchbook exchange: The importance of sharing physical work. *Proceedings - International Symposium on Wearable Computers, ISWC: 77–81*. <https://doi.org/10.1145/2641248.2641276>
- [12] Robert H Jack, Tony Stockman, and Andrew Mcpherson. Effect of latency on performer interaction and subjective quality assessment of a digital musical instrument. <https://doi.org/10.1145/2986416.2986428>
- [13] James R. Jordan. 1978. Interpolating digital data processing apparatus for correlation-type flow measurement. Retrieved July 26, 2018 from <https://patents.google.com/patent/US4254470>
- [14] Juan Aguilar. 2008. XY fabric interface. *Hackaday*. Retrieved July 9, 2018 from <https://hackaday.com/2008/05/30/xy-fabric-interface/>
- [15] Silicon Labs. 2013. *The world's most energy friendly microcontrollers Hardware Design for Capacitive Touch AN0040-Application Note*. Retrieved July 20, 2018 from www.silabs.com
- [16] Shongpun Lokavee, Theeraporn Puntheeranurak, Teerakiat Kerdcharoen, Natthapol Watthanwisuth, and Adisorn Tuantranont. 2012. Sensor pillow and bed sheet system: Unconstrained monitoring of respiration rate and posture movements during sleep. *Conference Proceedings - IEEE International Conference on Systems, Man and Cybernetics* <https://doi.org/10.1109/ICSMC.2012.6377959>
- [17] Jan Meyer, Paul Lukowicz, and Gerhard Tr. 2006. Textile Pressure Sensor for Muscle Activity and Motion Detection. *IEEE Xplore*: 2–5.
- [18] Microchip. TB3064 - Datasheet. Retrieved July 19, 2018 from http://www.microchip.com/stellent/groups/techpub_sg/documents/devicedoc/en550192.pdf
- [19] D K Naidu and R B Fisher. 1991. A Comparative Analysis of Algorithms for Determining the Peak Position of a Stripe to Sub-pixel Accuracy. In *Proceedings of the British Machine Vision Conference 1991*, 28.1–28.9. <https://doi.org/10.5244/C.5.28>
- [20] H. Nobach and M. Honkanen. 2005. Two-dimensional Gaussian regression for sub-pixel displacement estimation in particle image velocimetry or particle

- position estimation in particle tracking velocimetry. *Experiments in Fluids* 38, 4: 511–515. <https://doi.org/10.1007/s00348-005-0942-3>
- [21] Patrick Parzer, Siegfried Bauer, Michael Haller, Florian Perteneder, Kathrin Probst, Christian Rendl, Joanne Leong, Sarah Schuetz, Anita Vogl, Reinhard Schwoediauer, and Martin Kaltenbrunner. 2018. RESi: A Highly Flexible, Pressure-Sensitive, Imperceptible Textile Interface Based on Resistive Yarns. In *The 31st Annual ACM Symposium on User Interface Software and Technology - UIST '18*, 745–756. <https://doi.org/10.1145/3242587.3242664>
- [22] Patrick Parzer, Kathrin Probst, Teo Babic, Christian Rendl, Anita Vogl, Alex Olwal, and Michael Haller. 2016. FlexTiles: A Flexible, Stretchable, Formable, Pressure-Sensitive, Tactile Input. *Proceedings of the 2016 CHI Conference Extended Abstracts on Human Factors in Computing Systems - CHI EA '16*: 3754–3757. <https://doi.org/10.1145/2851581.2890253>
- [23] Patrick Parzer, Adwait Sharma, Anita Vogl, Jürgen Steimle, Alex Olwal, and Michael Haller. 2017. SmartSleeve: Real-time Sensing of Surface and Deformation Gestures on Flexible, Interactive Textiles, using a Hybrid Gesture Detection Pipeline Patrick. In *Proceedings of the 30th Annual ACM Symposium on User Interface Software and Technology - UIST '17*, 565–577. <https://doi.org/10.1145/3126594.3126652>
- [24] Paul Borke. 2009. Interpolation methods. Retrieved July 26, 2018 from <http://paulbourke.net/miscellaneous/interpolation/>
- [25] Ilya D. Rosenberg, Alexander Grau, Charles Hendee, Nadim Awad, and Ken Perlin. 2009. IMPAD - An Inexpensive Multi-Touch Pressure Acquisition Device. In *Proceedings of the 27th international conference extended abstracts on Human factors in computing systems - CHI EA '09*, 3217. <https://doi.org/10.1145/1520340.1520460>
- [26] Ilya Rosenberg and Ken Perlin. 2009. The UnMousePad - An Interpolating Multi-Touch Force-Sensing Input Pad. *ACM Trans. Graph. Article* 28, 10. <https://doi.org/10.1145/1531326.1531371>
- [27] Ilya Rosenberg, Ken Perlin, Charles Hendee, Alex Grau, and Nadim Awad. 2009. The UnMousePad - The Future of Touch Sensing. In *SIGGRAPH 2009*.
- [28] Andrew Schmeder and Adrian Freed. 2010. Support Vector Machine Learning for Gesture Signal Estimation with a Piezo-Resistive Fabric Touch Surface. *Proceedings of the 2010 Conference on New Interfaces for Musical Expression (NIME 2010)*, Nime: 244–249.
- [29] Stefan Schneegass and Alexandra Voit. 2016. GestureSleeve: using touch sensitive fabrics for gestural input on the forearm for controlling smartwatches. *Proceedings of the 2016 ACM International Symposium on Wearable Computers - ISWC '16*: 108–115. <https://doi.org/10.1145/2971763.2971797>
- [30] Semtech. 2010. Application note: capacitive touch sensing layout guidelines. 1–17. Retrieved July 20, 2018 from www.semtech.com
- [31] Paul Strohmeier, Jarrod Knibbe, Sebastian Boring, and Kasper Hornbæk. 2018. zPatch: Hybrid resistive/capacitive etextile input. In *TEI 2018 - Proceedings of the 12th International Conference on Tangible, Embedded, and Embodied Interaction*. <https://doi.org/10.1145/3173225.3173242>
- [32] Alexandra Voit and Stefan Schneegass. 2017. FabricID: Using Smart Textiles to Access Wearable Devices. In *Proceedings of the 16th International Conference on Mobile and Ubiquitous Multimedia - MUM '17*, 379–385. <https://doi.org/10.1145/3152832.3156622>
- [33] Irmandy Wicaksono and Joseph A Paradiso. 2017. FabricKeyboard: Multimodal Textile Sensate Media as an Expressive and Deformable Musical Interface. In *NIME*, 348–353.
- [34] Byungseok Yoo and Darryll J Pines. 2017. Development of two-dimensional interdigitated center of pressure sensor. *Smart Materials and Structures* 26, 12: 125013. <https://doi.org/10.1088/1361-665X/aa9427>
- [35] Bo Zhou, Jingyuan Cheng, Mathias Sundholm, and Paul Lukowicz. 2014. From smart clothing to smart table cloth: Design and implementation of a large scale, textile pressure matrix sensor. In *Lecture Notes in Computer Science*, 159–170. https://doi.org/10.1007/978-3-319-04891-8_14
- [36] Seaboard: The Future Of The Keyboard | ROLI. Retrieved August 7, 2018 from <https://roli.com/products/seaboard/>
- [37] Product – Joué. Retrieved August 7, 2018 from <https://www.play-joue.com/en/the-product/>
- [38] HOW TO GET WHAT YOU WANT. Retrieved August 7, 2018 from <http://www.kobakant.at/DIY/?p=6607>
- [39] E-Z Runner® Permanent Strips Refillable Value Pack - Scrapbook Adhesives by 3L. Retrieved August 7, 2018 from <https://www.scrapbook-adhesives.com/products/new-value-pack-e-z-runner-refillable-permanent-strips-1>
- [40] X-Carve. Retrieved August 7, 2018 from <https://www.inventables.com/technologies/x-carve>